




Product Service

CERTIFICATE

No. Z2 118771 0012 Rev. 01

Holder of Certificate: **Zhejiang Sunpro Power Technology co., Ltd**
Qinggang Technological Ind.Zone
317606 Yuhuan, Zhejiang Province
PEOPLE'S REPUBLIC OF CHINA

Certification Mark:

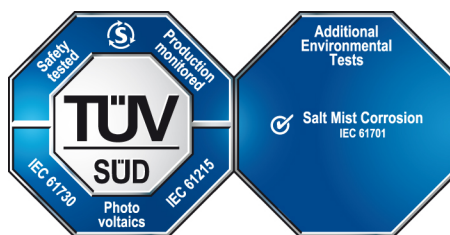

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-Crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the Testing, Certification, Validation and Verification Regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 704062123507-03

Valid until: 2029-07-24

Date, 2024-07-31


(Zhulin Zhang)

ZERTIFIKAT ◆ CERTIFICATE ◆ 認證證書 ◆ CERTIFICADO ◆ CERTIFIKAT ◆ CERTIFICATE

CERTIFICATE

No. Z2 118771 0012 Rev. 01

Model(s):

SPDGxxx-144M10, SPDGxxxA-144M10, xxx=520-565, in steps of 5
 SPDGxxx-132M10, SPDGxxxA-132M10, xxx=480-515, in steps of 5
 SPDGxxx-120M10, SPDGxxxA-120M10, xxx=435-470, in steps of 5
 SPDGxxx-108M10, SPDGxxxA-108M10, xxx=390-420, in steps of 5
 SPDGxxx-N156M10, SPDGxxxA-N156M10, xxx=595-640, in steps of 5
 SPDGxxx-N144M10, SPDGxxxA-N144M10, xxx=545-590, in steps of 5
 SPDGxxx-N132M10, SPDGxxxA-N132M10, xxx=510-540, in steps of 5
 SPDGxxx-N120M10, SPDGxxxA-N120M10, xxx=455-490, in steps of 5
 SPDGxxx-N108M10, SPDGxxxA-N108M10, xxx=410-440, in steps of 5
 SPDGxxx-132M12, SPDGxxxA-132M12, xxx=635-675, in steps of 5
 SPDGxxx-120M12, SPDGxxxA-120M12, xxx=580-610, in steps of 5
 SPDGxxx-110M12, SPDGxxxA-110M12, xxx=530-560, in steps of 5
 SPDGxxx-N132M12, SPDGxxxA-N132M12, xxx=670-710, in steps of 5
 SPDGxxx-N120M12, SPDGxxxA-N120M12, xxx=610-645, in steps of 5
 SPDGxxx-N110M12, SPDGxxxA-N110M12, xxx= 560-590, in steps of 5
 SPDGxxx-144M, SPDGxxxA-144M, xxx=410-460, in steps of 5
 SPDGxxx-120M, SPDGxxxA-120M, xxx=340-385, in steps of 5
 SPDGxxx-N156R10, SPDGxxxA-N156R10, xxx=610-645, in steps of 5
 SPDGxxx-N144R10, SPDGxxxA-N144R10, xxx=565-595, in steps of 5
 SPDGxxx-N132R10, SPDGxxxA-N132R10, xxx=520-545, in steps of 5
 SPDGxxx-N120R10, SPDGxxxA-N120R10, xxx=470-500, in steps of 5
 SPDGxxx-N108R10, SPDGxxxA-N108R10, xxx=420-450, in steps of 5
 SPDGxxx-N144RL10, SPDGxxxA-N144RL10, xxx=575-610, in steps of 5
 SPDGxxx-N132RL10, SPDGxxxA-N132RL10, xxx=530-560, in steps of 5
 SPDGxxx-N120RL10, SPDGxxxA-N120RL10, xxx=480-510, in steps of 5
 SPDGxxx-N108RL10, SPDGxxxA-N108RL10, xxx=430-460, in steps of 5
 SPDGxxx-N144RX10, SPDGxxxA-N144RX10, xxx=600-640, in steps of 5
 SPDGxxx-N132RX10, SPDGxxxA-N132RX10, xxx=550-590, in steps of 5
 SPDGxxx-N132R12, SPDGxxxA-N132R12, xxx=575-620, in steps of 5
 SPDGxxx-N120R12, SPDGxxxA-N120R12, xxx=525-565, in steps of 5
 SPDGxxx-N108R12, SPDGxxxA-N108R12, xxx=470-505, in steps of 5
 SPDGxxx-N96R12, SPDGxxxA-N96R12, xxx=420-450, in steps of 5
 xxx is standing for rated output power at STC

Parameters:

Construction:	Framed, double glass with Junction box, Cable and Connectors.
Safety Class:	Class II
Maximum System Voltage:	1500 V DC
Fire Safety Class:	Class A or Class C according to UL790
Test method of salt mist test:	Test method 6

Tested according to:

IEC 61215-1:2021
 IEC 61215-1-1:2021
 IEC 61215-2:2021
 IEC 61730-1:2023
 IEC 61730-2:2023
 IEC 61701:2020